





### SPECIFICATIONS

Current Rating:1.0AMP  
 Contact Resistance:20m Max.  
 Insulation Resistance:1000M Min.  
 Withstanding Voltage :500V AC/Minute  
 Operation Temperature:-40°C to+105°C  
 Contact Material:Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material:Polyester (UL94V-0)  
 Standard:PBT+30%GF


1,27mm flat cable

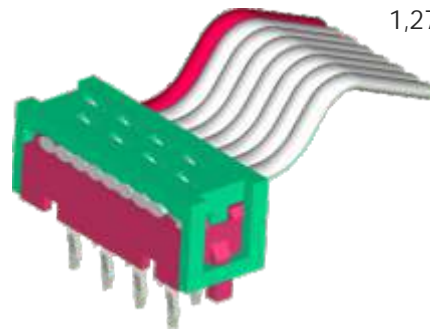

Tray Packing

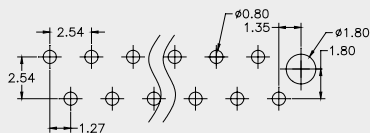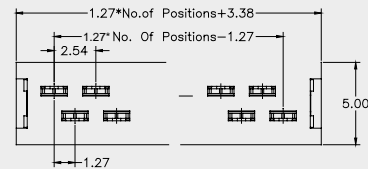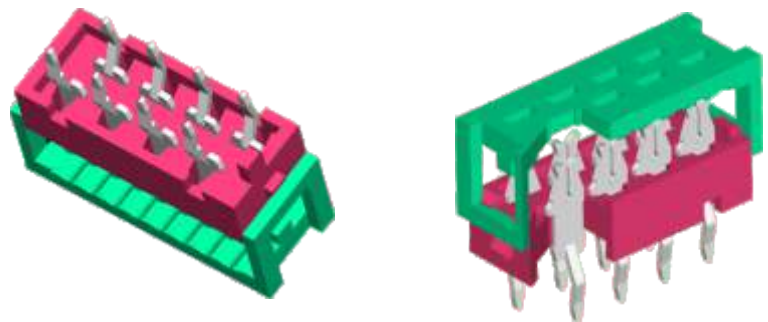

Recommended P.C.B Layout( Top Side)

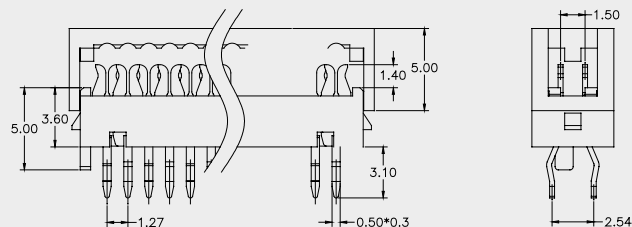

rok080827rev120131

1	120131	Logo changed	rok
REV	DATE	NOTE	NAME