













SPECIFICATIONS

Current Rating:1.0AMP
 Contact Resistance:20m Max.
 Insulation Resistance:1000M Min.
 Withstanding Voltage :500V AC/Minute
 Operation Temperature: -40°C to+105°C
 Contact Material:Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material:Polyester (UL94V-0)
 Standard:PBT+30%GF




detail

Tube Packing

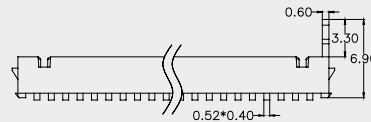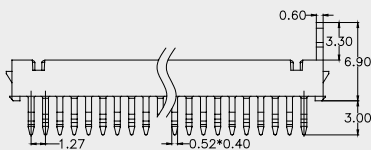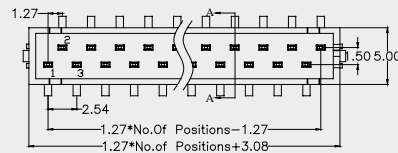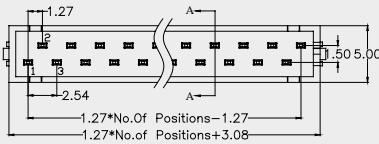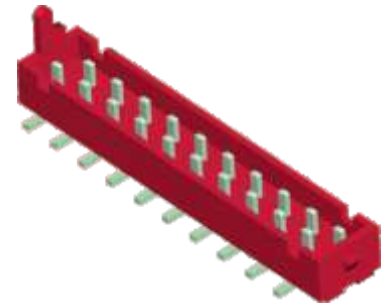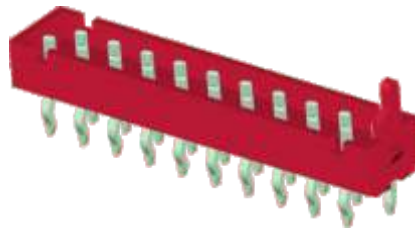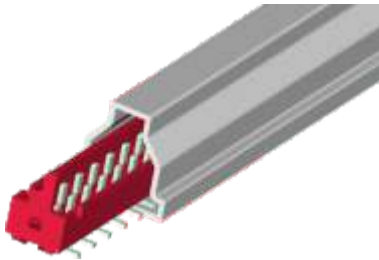

Recommended P.C.B Layout (Top Side)

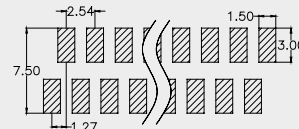

Recommended P.C.B Layout (Top Side)

| | | | |
|-----|--------|--------------|------|
| | | | |
| | | | |
| | | | |
| 1 | 120131 | Logo changed | rok |
| REV | DATE | NOTE | NAME |