
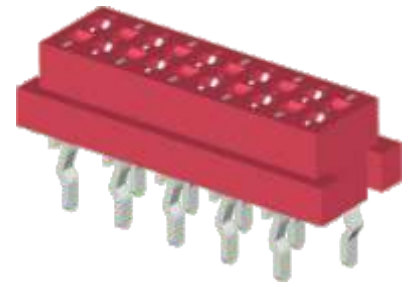













**SPECIFICATIONS**

Current Rating: 1.0AMP  
 Contact Resistance: 20m Max.  
 Insulation Resistance: 1000M Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Phosphor Bronze  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF

Detail



Tube Packing

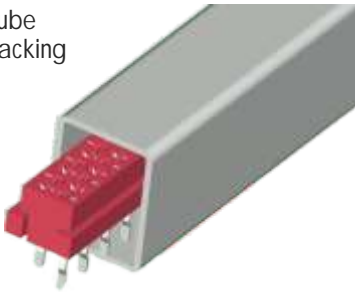

rok080827rev120131

1	120131	Logo changed	rok
REV	DATE	NOTE	NAME