


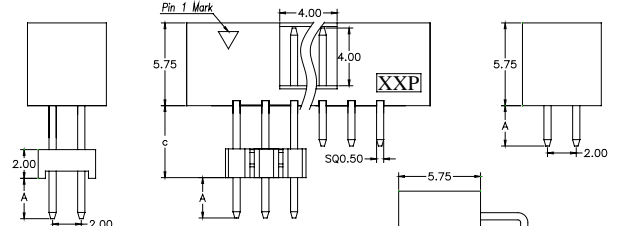
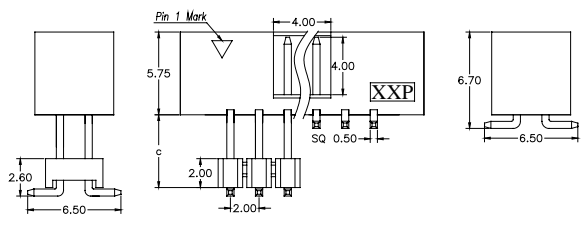


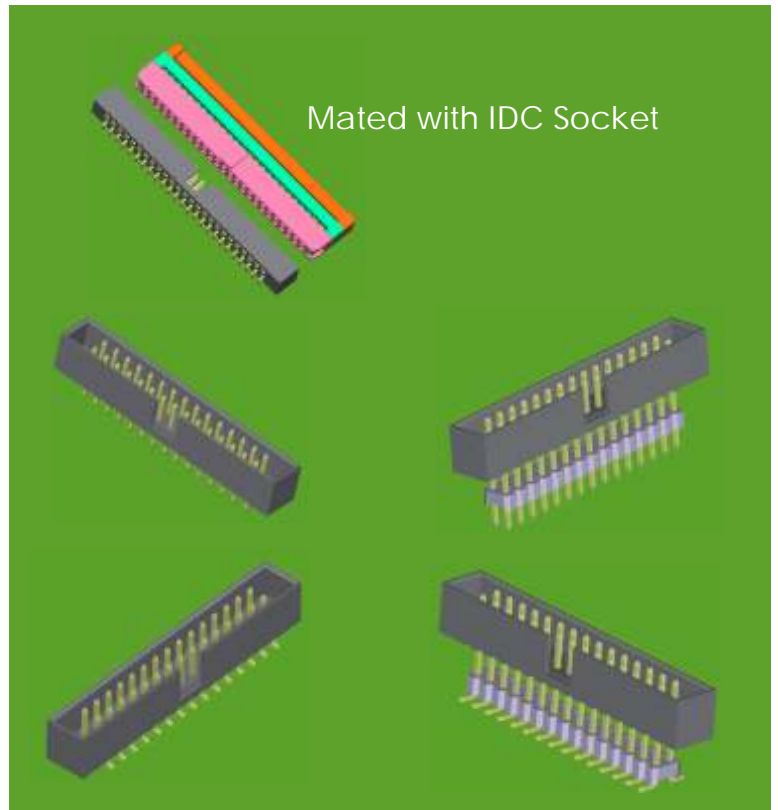


SPECIFICATIONS

Current Rating: 1.5AMP
 Contact Resistance: 20m Max.
 Insulation Resistance: 1000M Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

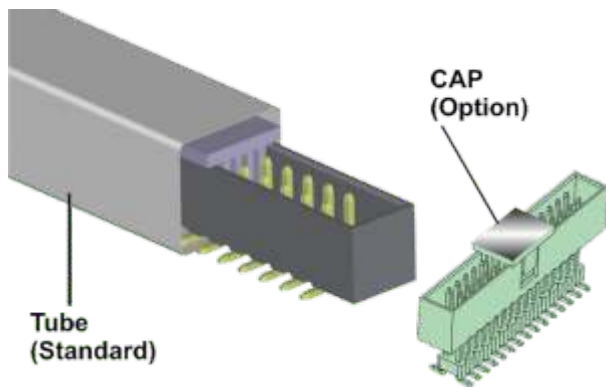

1	120125	Logo changed	rok
REV	DATE	NOTE	NAME