2.00mm Pin Header, Dual Row, Double Layer

PANCON CONNECTORS

SPECIFICATIONS

Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 500V AC/Minute
Operation Temperature: −40°C to+105°C
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PA6T+30%GF

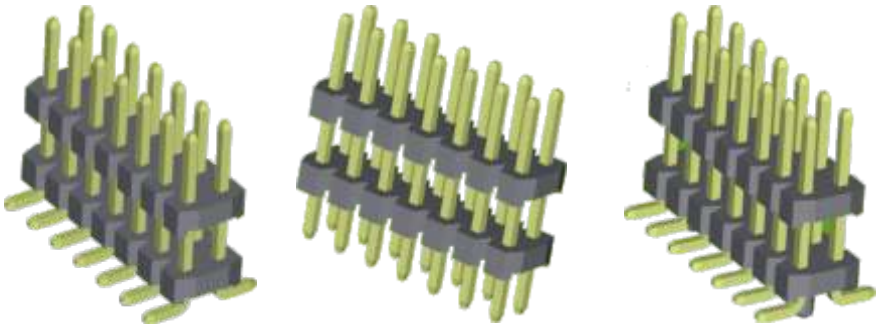

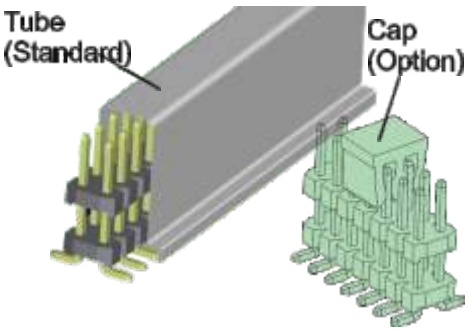

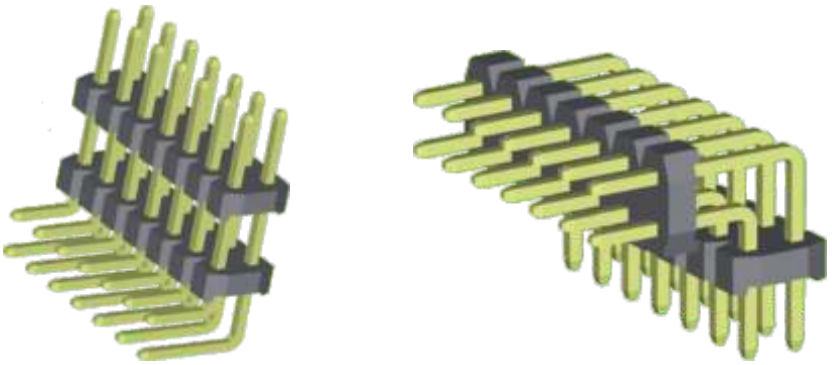

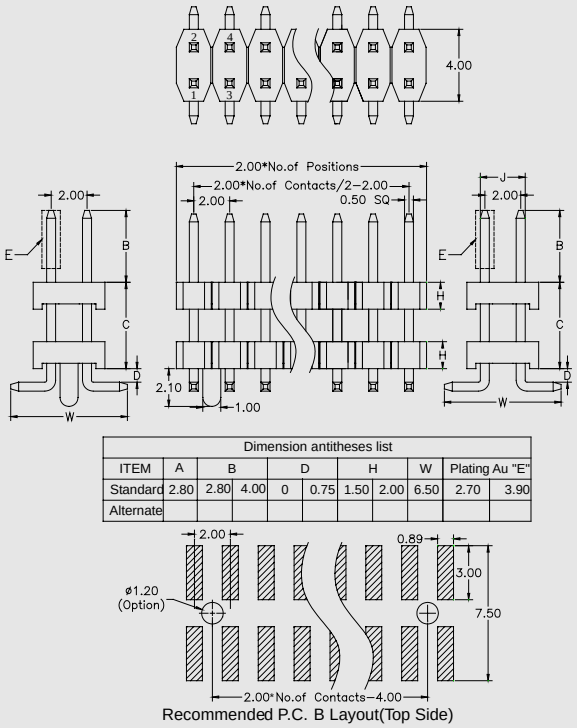

Dimension antitheses list									
ITEM	A	B		D		H	W	Plating Au "E"	
Standard	2.80	2.80	4.00	0	0.75	1.50	2.00	6.50	2.70	3.90
Alternate										

Recommended P.C. B Layout(Top Side)

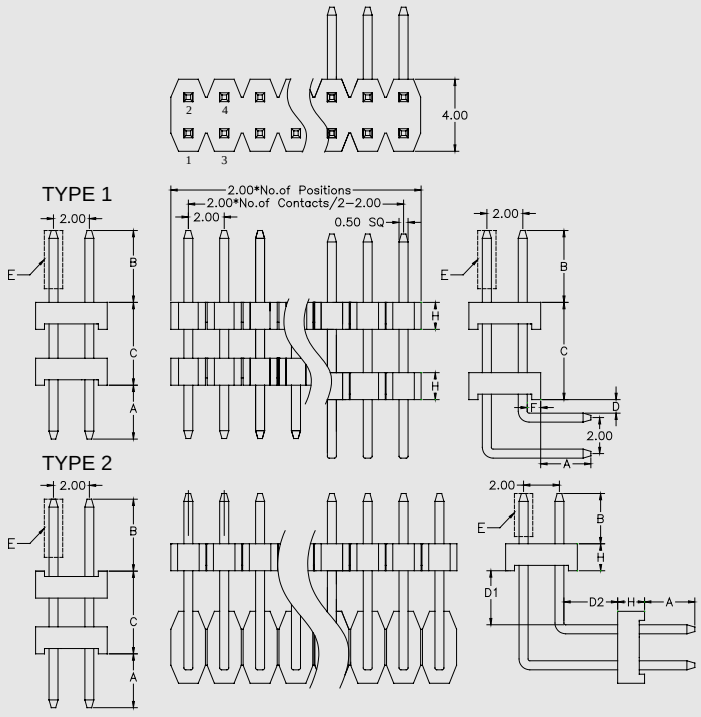

REV	DATE	NOTE	NAME
1	120207	Logo changed	rok

rok081126rev120207

Pancon GmbH, Siemensstrasse 7, 61267 Neu-Anspach
Tel: +496081-964-0, Fax: +496081-964-201, www.pancon.de / GERMANY

Datenblatt / Datasheet