



SPECIFICATIONS


Current Rating: 0.5AMP
 Contact Resistance: 30m Max.
 Insulation Resistance: 100M Min.
 Withstanding Voltage : 50V AC/Minute
 Operation Temperature: -20°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF

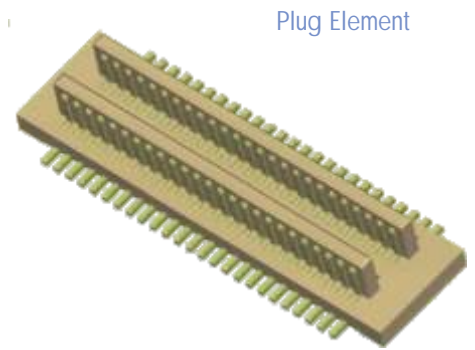

Plug Element

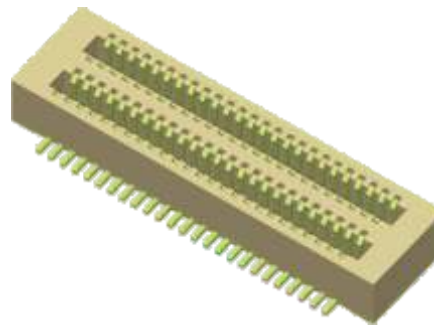











Socket Element

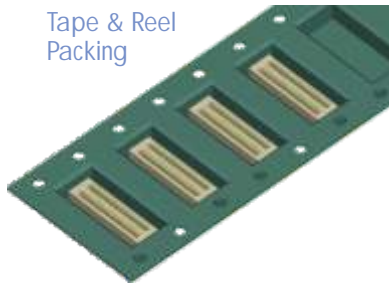


Tape & Reel Packing

PLUG SERIES

SOCKET SERIES



HIGH(H)	PLUG(H1)	SOCKET(H2)
3.0H	1.0H	2.0H
3.5H	1.5H	2.0H
4.0H	2.0H	2.0H
4.5H	1.5H	3.0H
5.0H	2.0H	3.0H
5.5H	2.5H	3.0H
6.0H	3.0H	3.0H

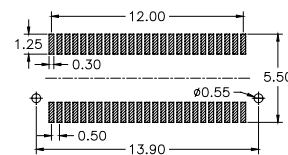

Recommended P.C.B Layout(Top Side)

Recommended P.C.B Layout(Top Side)

1	120125	Logo changed	rok
REV	DATE	NOTE	NAME