



SPECIFICATIONS

Current Rating: 0.5AMP
 Contact Resistance: 40m Max.
 Insulation Resistance: 100M Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: LCP+30%GF

Plug Element

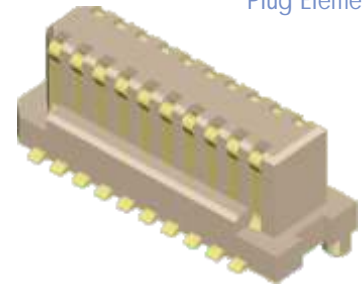


Socket Element

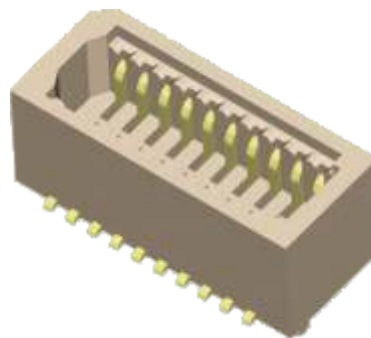

Tape & Reel Packing




PLUG SERIES

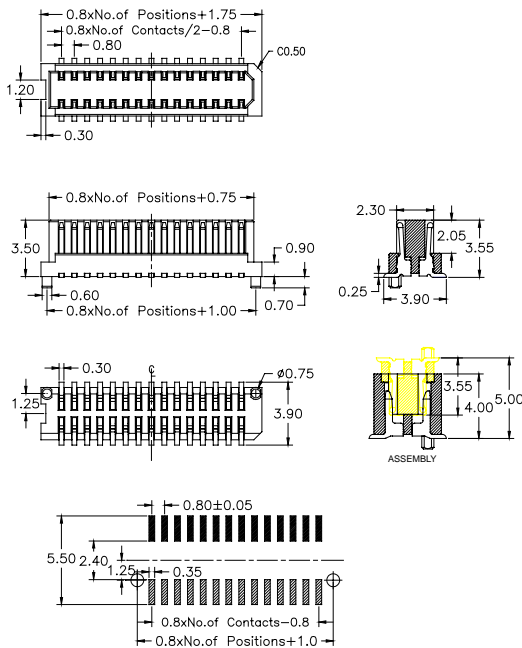

Recommended P.C.B Layout(Top Side)

SOCKET SERIES

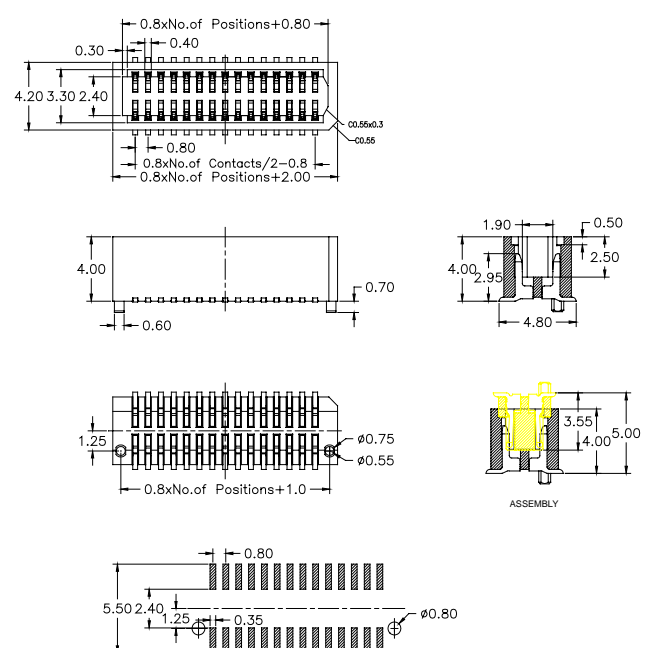

Recommended P.C. B Layout(Top Side)

1	120125	Logo changed	rok
REV	DATE	NOTE	NAME