


**SPECIFICATIONS**

Current Rating: 0.5AMP  
 Contact Resistance: 50m Max.  
 Insulation Resistance: 100M Min.  
 Withstanding Voltage : 500V AC/Minute  
 Operation Temperature: -25°C to +80°C  
 Contact Material: Copper Alloy  
 Contact plating: Au or Tin Over Ni  
 Insulator Material: Polyester (UL94V-0)  
 Standard: PBT+30%GF  
 Shell: Socc ,Ni Plate I



Tray Packing

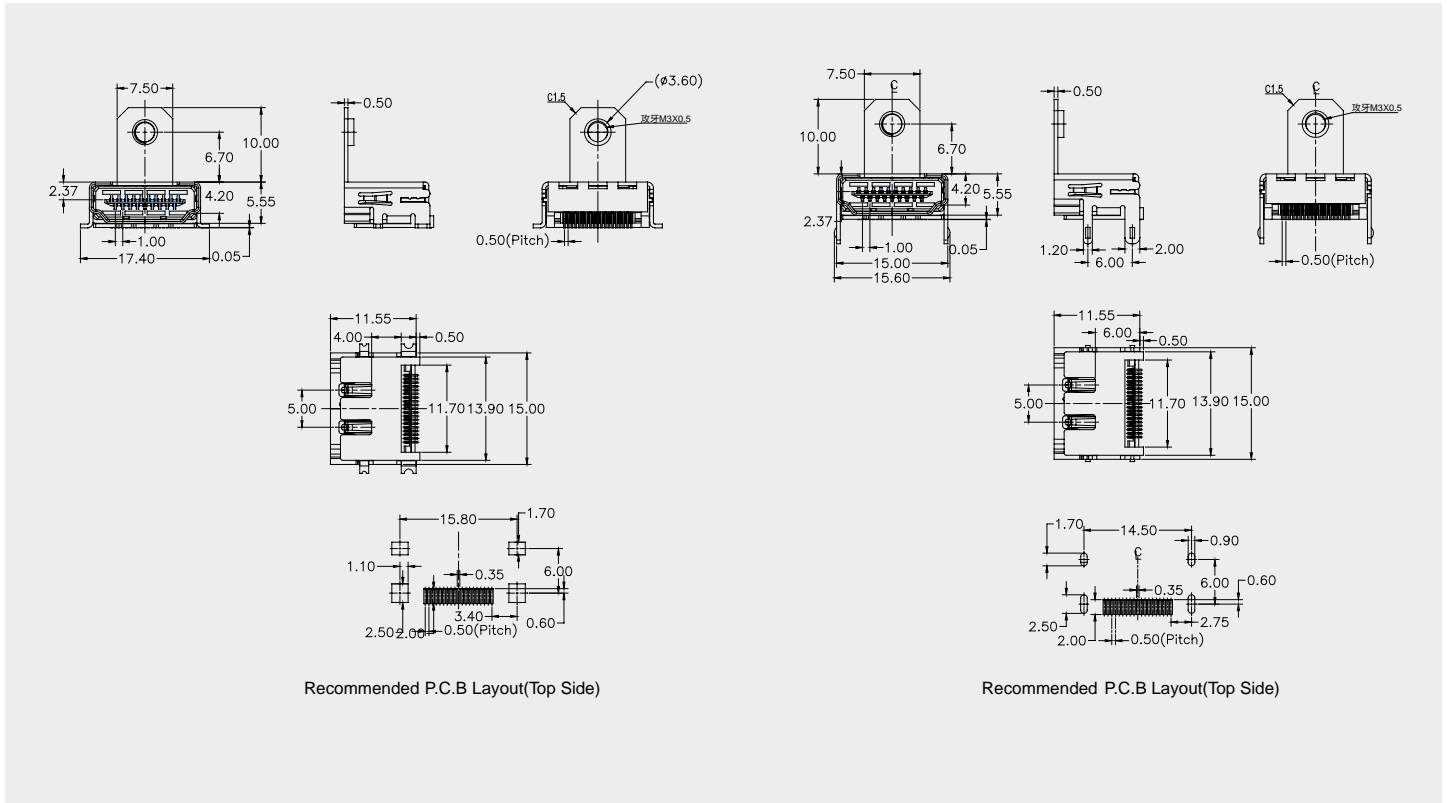

rok080828rev120119

1	120123	Logo changed	rok
REV	DATE	NOTE	NAME