
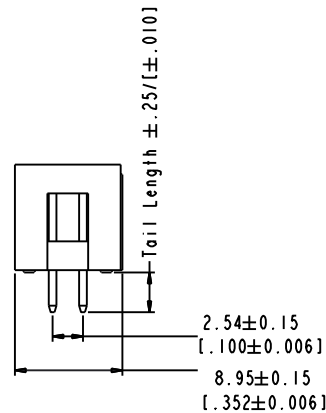
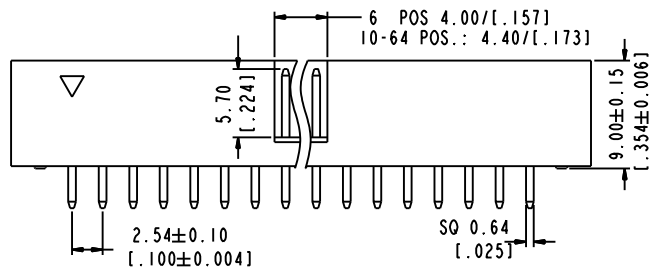
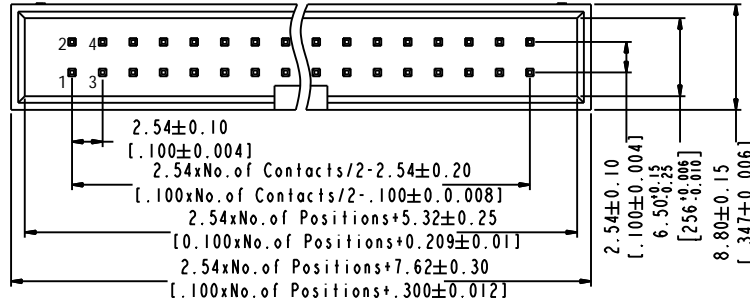



NOTES:


- 1) CURRENT RATING: 3.0A
- 2) CONTACT RESISTANCE: 20 mΩ MAX.
- 3) INSULATION RESISTANCE: 1000MΩ MIN.
- 4) WITHSTANDING VOLTAGE: 1000V.
- 5) OPERATING TEMPERATURE: -40°C TO 105°C.
- 6) HOUSING MATERIAL: PBT OR PA9T 30%GF UL 94V-0; GRAY
- 7) PIN MATERIAL: BRASS ALLOY.
- 8) ALL DIMENSIONS ARE MM/[IN.]

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05/[.002])

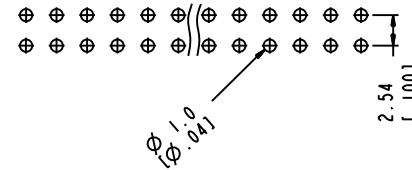

P/N LEGEND
057-0XX-1XXX

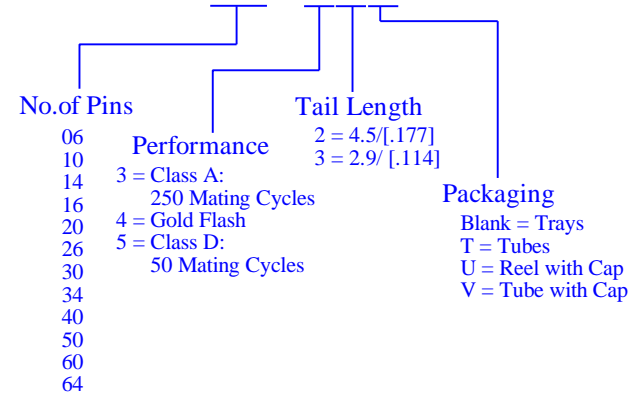

				PRINT DIST.	PROD. REL.	DWS	7/8/14	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	 350 REVOLUTIONARY DR. E. TAUNTON, MA 02718
				DIV #	QUOTE REL.			APP.	DECIMALS ±.010	
				GMBH X	DRAWN BY	DWS	7/8/14		METRIC ±0.25mm	PART NAME LAT-CON 057 SERIES STRAIGHT LOW PROFILE HEADER
				A/L	SUPERSEDES DWG. DATED:				ANGLES ±1°	
				S3	SCALE 2/1			DO NOT SCALE PRINT		CAD#: KA-10358-REV12
				MIE	MATERIAL:			SEE NOTES		
12	S000367		7/8/14	CON X	FINISH:			SEE P/N LEGEND		P/N: KA-10358
REV	DESCRIPTION	DATE DR.		PAK						



DWG SIZE: A