
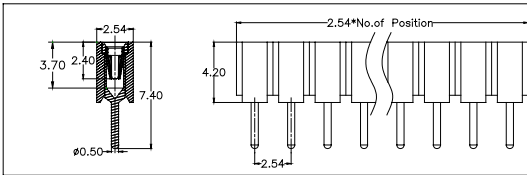
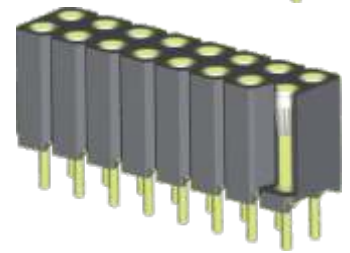





**SPECIFICATIONS**


Insulator: Black glass filled polyester PPS+30%GF  
 Flammability: UL94V-0  
 Sleeve: Brass CuZn 36pb3(36000)  
 Contact clip(6 finger): Beryllium copper (C17200)  
 Mating pin  $\phi$ : 0.76 Or 0.64mm  
 Forces: (polished steel gauge  $\phi$ 0.76mm)  
 -Insertion: 3N typ. -Withdrawal: 1.5N typ.  
 Mechanical life :min 500 cycles  
 Rated current: 3.0A  
 Contact resistance: max 10m  
 Dielectric strength :min 1000VR<sub>MX</sub>

Machined Pin


Contact Element

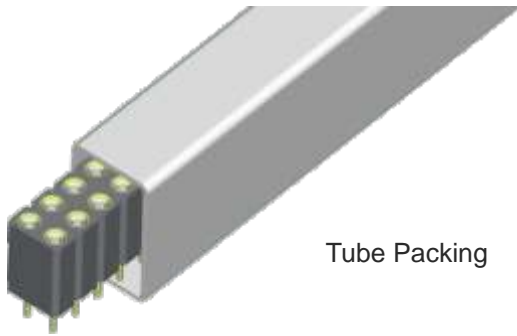


Straight socket connector height  
 4.2mm:solder tail,single row  
 Availability from:1 to 40 contacts  
 Standard number of contacts  
 5,6,8,9,10,11,12,14,16,17,20,25,30,32,40

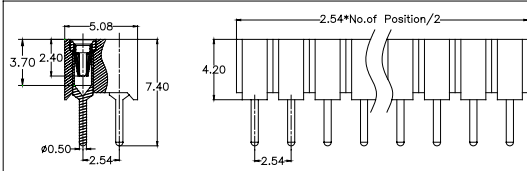

Straight socket connector height  
 4.2mm:solder tail,double row  
 Availability from:4 to 80 contacts  
 Standard number of contacts  
 16,18,26,40,72,80

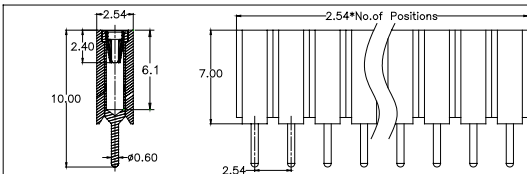

Straight socket connector height  
 7.0mm:solder tail,single row  
 Availability from:1 to 40 contacts  
 Standard number of contacts  
 5,6,8,9,10,11,12,14,16,17,20,25,30,32,40

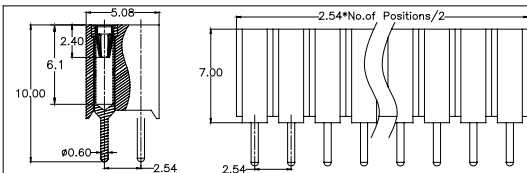

Straight socket connector height  
 7.0mm:solder tail,double row  
 Availability from:4 to 80 contacts  
 Standard number of contacts  
 16,18,26,40,72,80

1	120125	Logo changed	rok
REV	DATE	NOTE	NAME